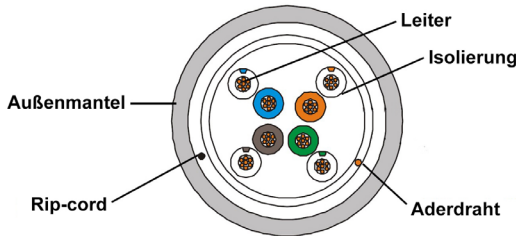


## Cat5e - FTP - FLEXIBEL - PVC

Kategorie	PATCH F/UTP CAT5E-4P-PVC																																																																																																				
Referenz	ISO/IEC 11801 TIA-568-C.2																																																																																																				
CPR Klasse	Fca																																																																																																				
Kern	Flexibel - 100% Kupfer																																																																																																				
Schirmung	FTP	<div>Technische Leistung (&lt;30m):</div> <table><tr><th>Frequenz (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>19.0</td><td>3.0</td><td>60.0</td><td>521</td></tr><tr><td>4.0</td><td>19.0</td><td>3.9</td><td>54.8</td><td>504</td></tr><tr><td>8.0</td><td>19.0</td><td>5.5</td><td>50.0</td><td>500</td></tr><tr><td>10.0</td><td>19.0</td><td>6.2</td><td>48.5</td><td>498</td></tr><tr><td>16.0</td><td>19.0</td><td>7.9</td><td>45.2</td><td>496</td></tr><tr><td>20.0</td><td>19.0</td><td>8.9</td><td>43.7</td><td>495</td></tr><tr><td>25.0</td><td>18.0</td><td>10.0</td><td>42.1</td><td>495</td></tr><tr><td>31.25</td><td>17.1</td><td>11.2</td><td>40.5</td><td>494</td></tr><tr><td>62.5</td><td>14.1</td><td>16.2</td><td>35.7</td><td>492</td></tr><tr><td>100</td><td>12.0</td><td>21.0</td><td>32.3</td><td>491</td></tr></table> <div><table><tr><th>Frequenz (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>57.0</td><td>58.6</td><td>55.6</td></tr><tr><td>4.0</td><td>51.8</td><td>46.6</td><td>43.6</td></tr><tr><td>8.0</td><td>47.0</td><td>40.6</td><td>37.5</td></tr><tr><td>10.0</td><td>45.5</td><td>38.6</td><td>35.6</td></tr><tr><td>16.0</td><td>42.2</td><td>34.5</td><td>31.5</td></tr><tr><td>20.0</td><td>40.7</td><td>32.6</td><td>29.6</td></tr><tr><td>25.0</td><td>39.1</td><td>30.7</td><td>27.7</td></tr><tr><td>31.25</td><td>37.5</td><td>28.7</td><td>25.7</td></tr><tr><td>62.5</td><td>32.7</td><td>22.7</td><td>19.7</td></tr><tr><td>100</td><td>29.3</td><td>18.6</td><td>15.6</td></tr></table></div>	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	19.0	3.0	60.0	521	4.0	19.0	3.9	54.8	504	8.0	19.0	5.5	50.0	500	10.0	19.0	6.2	48.5	498	16.0	19.0	7.9	45.2	496	20.0	19.0	8.9	43.7	495	25.0	18.0	10.0	42.1	495	31.25	17.1	11.2	40.5	494	62.5	14.1	16.2	35.7	492	100	12.0	21.0	32.3	491	Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	57.0	58.6	55.6	4.0	51.8	46.6	43.6	8.0	47.0	40.6	37.5	10.0	45.5	38.6	35.6	16.0	42.2	34.5	31.5	20.0	40.7	32.6	29.6	25.0	39.1	30.7	27.7	31.25	37.5	28.7	25.7	62.5	32.7	22.7	19.7	100	29.3	18.6	15.6
Frequenz (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																																																																
1	19.0		3.0	60.0	521																																																																																																
4.0	19.0		3.9	54.8	504																																																																																																
8.0	19.0		5.5	50.0	500																																																																																																
10.0	19.0		6.2	48.5	498																																																																																																
16.0	19.0		7.9	45.2	496																																																																																																
20.0	19.0		8.9	43.7	495																																																																																																
25.0	18.0		10.0	42.1	495																																																																																																
31.25	17.1		11.2	40.5	494																																																																																																
62.5	14.1		16.2	35.7	492																																																																																																
100	12.0		21.0	32.3	491																																																																																																
Frequenz (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																																																																	
1	57.0		58.6	55.6																																																																																																	
4.0	51.8		46.6	43.6																																																																																																	
8.0	47.0		40.6	37.5																																																																																																	
10.0	45.5		38.6	35.6																																																																																																	
16.0	42.2		34.5	31.5																																																																																																	
20.0	40.7		32.6	29.6																																																																																																	
25.0	39.1	30.7	27.7																																																																																																		
31.25	37.5	28.7	25.7																																																																																																		
62.5	32.7	22.7	19.7																																																																																																		
100	29.3	18.6	15.6																																																																																																		
AWG	26																																																																																																				
Durchmesser Kabel	6 mm																																																																																																				
Länge	100m																																																																																																				
Bandbreite	100.0 MHz																																																																																																				
Biegeradius	8x Durchmesser Kabel																																																																																																				
Maximale Ziehkraft (Mpa)	≥ 10																																																																																																				
Material Außenmantel	PVC																																																																																																				
Farbe Außenmantel	Grau																																																																																																				
Aderfarben	1 - Blau/ Weiß-Bau																																																																																																				
	2 - Orange/ Weiß-Orange																																																																																																				
	3 - Grün/ Weiß-Grün																																																																																																				
	4 - Braun/ Weiß-Braun																																																																																																				
Rip-cord	Integriert																																																																																																				
Verpackung	Abrollkarton																																																																																																				